

### Security framed front-mounted wall mirror:

- Model SA03-1 (Stainless Steel)
- Model SA03-2 (Stainless Steel)
- Model SA03-5 (Plexiglas®)

### Product Materials

**FRAME:** 14 gauge stainless steel, seamless construction, with exposed surfaces in architectural satin finish. Unit supplied with 1/4" - 20 x 1 1/2" T27 torx head machine screws for installation to wall anchors (not included). Mirror material held to frame by fiberboard backing.

**MIRROR MODEL SA03-1:** mirror is 20 gauge, stainless steel polished to a No. 8 architectural finish. Stretcher leveled for uniform finish. Very bright – excellent reflectivity, very slight polish grain.

**MIRROR MODEL SA03-2:** mirror is 20 gauge, stainless steel, bright annealed. Stretcher leveled for uniform finish. Surface is bright and smooth with mirror-like finish.

**MIRROR MODEL SA03-5:** plexiglass mirror is 1/4" thick with excellent reflectivity. Surface subject to scratching and must not be cleaned with abrasive cleaners. (Plexiglas is a Registered Trademark of Rohm & Haas.)

- Stainless steel mirrors will differ in optical quality from glass mirrors.


### ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.



Washroom Accessories  
Document No. 9175

**Dimensions**

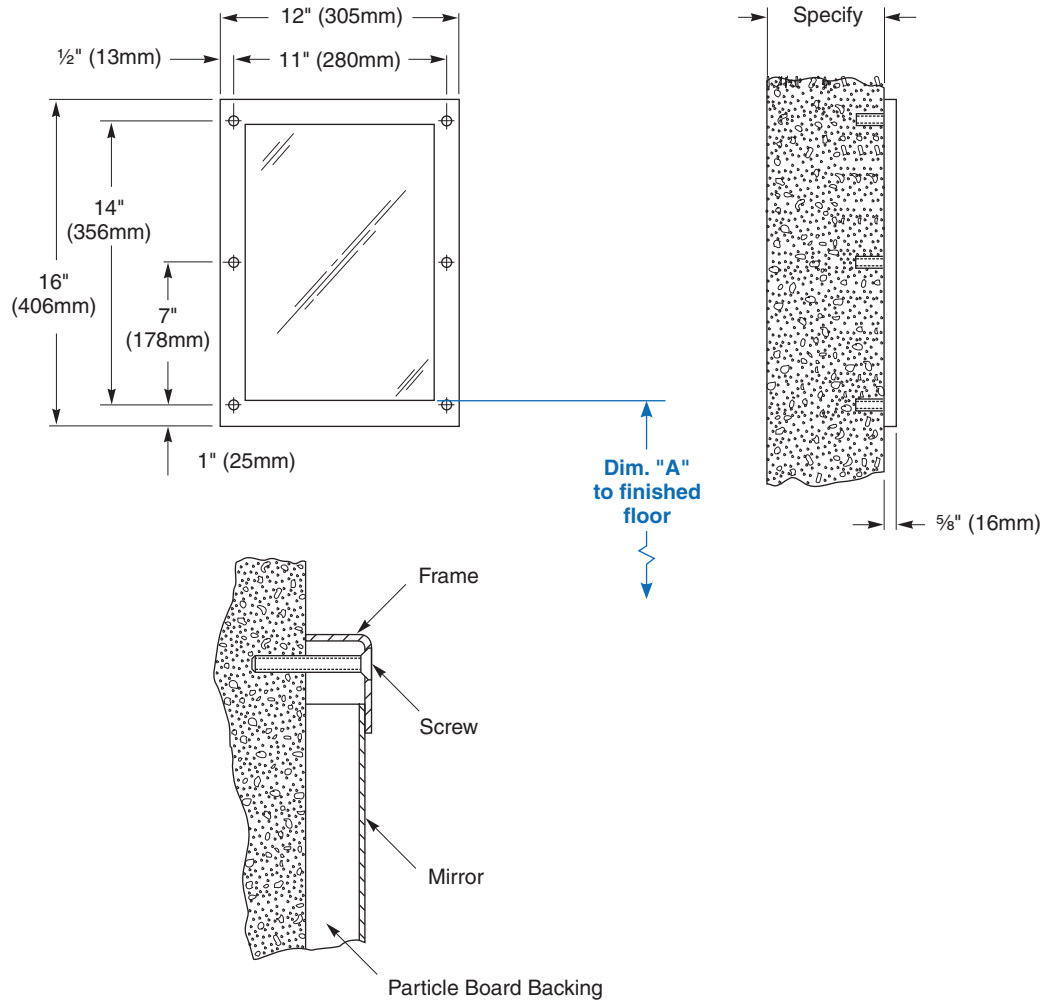

<b>Dim. "A" Key Surface:</b>	For Dim. "A"	Top of Unit	Bottom of Unit
Mirror's bottom edge of the reflective surface to finished floor	40" (1016mm)	55" (1397mm)	39" (991mm)
	37" (940mm)	52" (1321mm)	36" (914mm)
	34" (864mm)	49" (1245mm)	33" (838mm)
<b>Rough wall opening:</b>			
Surface Mount:	No rough wall opening, see overall dimensions		

**Washroom Accessories  
Document No. 9175**