

## Purist™

Two-hole bridge kitchen sink faucet K-7547-4

#### Features

- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Two lever handles offer separate control of hot and cold water.
- Coordinates with other products in the Purist collection.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).

#### Material


- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

- Two-hole installation.
- Flexible supply lines simplify installation.

#### **Recommended Products/Accessories**

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack K-23723 Faucet cleaner





#### **Codes/Standards**

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

#### **KOHLER®** Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description                       |
|-------|------|-----------------------------------|
|       | CP   | Polished Chrome                   |
|       | SN   | Vibrant® Polished Nickel          |
|       | VS   | Vibrant® Stainless                |
|       | BL   | Matte Black                       |
|       | 2MB  | Vibrant® Brushed Moderne<br>Brass |



# KOHLER, Faucets

Purist™ Two-hole bridge kitchen sink faucet K-7547-4

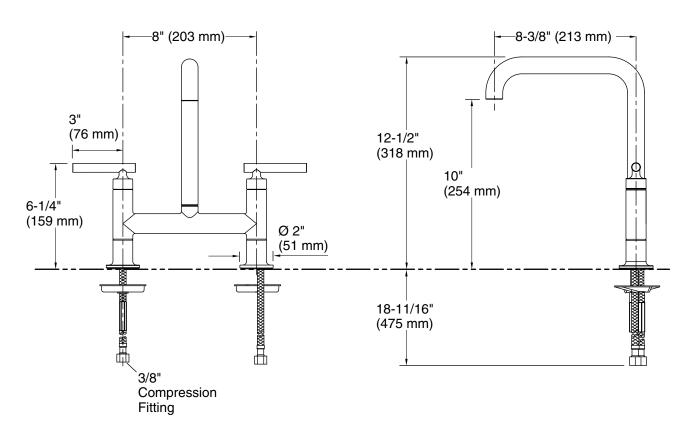

#### **Technical Information**

All product dimensions are nominal.

#### Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

