131-180 **ALTO**®

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Round front bowl
- · 2' flush tower
- · Anti-siphon ballcock
- 10' rough-in
- · Model 40 color-match, plastic trip lever
- · 2' glazed trapway
- · The Mansfield® Limited Lifetime Warranty
- · Available in White, Biscuit, and Bone



COMPONENTS

| MODEL # | DESCRIPTION | CODES/STANDARDS | |
|-------------------------------|---|-----------------|--|
| 131-180 | Round front, two-piece toilet. | | |
| 131 | Round front, toilet bowl only. Less toilet seat. Specify color. | UPC | |
| 180 | Tank and cover only with left hand, front-mount, color match, plastic trip lever. Less supply. Specify color. | c ® | |
| TANK TRIM & REPLACEMENT PARTS | | | |
| 40 | Trip lever - color-match , plastic trip lever, left hand | | |
| 211-1112 | Flush tower | | |
| 08ULF-1112 | Anti-siphon ballcock | | |
| 630-0030 | Replacement flush valve seal | | |
| 160-LID | Tank lid | | |



MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

| MODEL # | DESCRIPTION | CODES/STANDARDS |
|---------|--|-----------------|
| 131-180 | Round front (1.6 gpf / 6.0 lpf) two-piece toilet | C ® |


| MATERIAL | Vitreous China |
|----------------------|-------------------|
| WATER PRESSURE RANGE | 20 to 80 PSI |
| FLUSH SYSTEM | 2' Flush Tower |
| WATER USAGE | 1.6 gpf / 6.0 lpf |
| WATER SURFACE AREA | 8' X 9' |
| ROUGH-IN | 10' |
| MAP RATING | 800 grams |

| TRAP DIAMETER | 2' |
|-----------------|---|
| TRAP SEAL | 2-1/4' |
| SHIPPING WEIGHT | Model 131 - 47 lbs. (21 kg) Model 180 - 34 lbs. (15 kg) |
| WARRANTY | Vitreous China - Limited Lifetime Tank Trim - Limited One Year |

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

| TANK OPTIONS | | | |
|--------------|---|--|--|
| 160 | Standard 1.6 gpf configuration: 2" flush tower, anti-siphon ballcock, left hand, chrome trip lever. | | |
| 160RH | Variation of model 160, with right hand trip lever. | | |
| 161 | Variation of model 160, with Fluidmaster® antisiphon pilot fill valve. | | |
| 165 | Variation of model 160, with cover lock. | | |
| 170 | Variation of model 160, with tank liner. | | |
| 172 | Variation of model 160, with Fluidmaster® anti- siphon pilot fill valve, 2" flapper and chrome trip lever. | | |
| 173 | Variation of model 160, with Fluidmaster® anti- siphon pilot fill valve, 2" flapper and color-match trip lever. | | |
| 173RH | Variation of model 173, with right hand trip lever. | | |
| 174 | Variation of model 173, with tank liner. | | |
| 175 | Variation of model 160, with cover lock and tank liner. | | |
| 180 | Variation of model 160, with color-match trip lever. | | |
| 181 | Variation of model 160, with Fluidmaster® anti- siphon pilot fill valve and color-match trip lever. | | |
| 190 | Variation of model 160, with color-match trip lever and tank liner. | | |

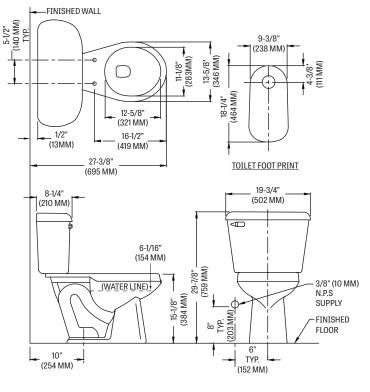

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

