

4148-3148 BRENTWOOD® 1.28



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- Concealed trapway for easier cleaning
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Elongated front, SmartHeight™ bowl
- Complies with ADA requirements for accessibility
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 76 chrome-plated, metal trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White and Biscuit



MODEL 4148-3148

Toilet seat not included



ELONGATED



SMARTHEIGHT ADA

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4148-3148	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply. Specify color.	
4148	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply. Specify color.	
3148	Tank and cover only, with left hand, chrome-plated, metal trip lever. Less supply. Specify color.	

TANK TRIM & REPLACEMENT PARTS





76	Trip lever - chrome-plated, metal trip lever, left hand
2206	Pilot operated fill valve
630-0207	Replacement flapper
3147-LID	Tank lid

4148-3148 BRENTWOOD® 1.28



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4148-3148	Elongated front, SmartHeight™ (1.28gpf/4.8 lpf) two-piece toilet	   

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3" MagnaFlush™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	7" X 9-1/4"
ROUGH-IN	12"
MAP RATING	800 grams

TRAP DIAMETER	2-1/4"
TRAP SEAL	2-1/2"
SHIPPING WEIGHT	Model 4148- 52 lbs. (23 kg) Model 3148- 39 lbs. (18 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

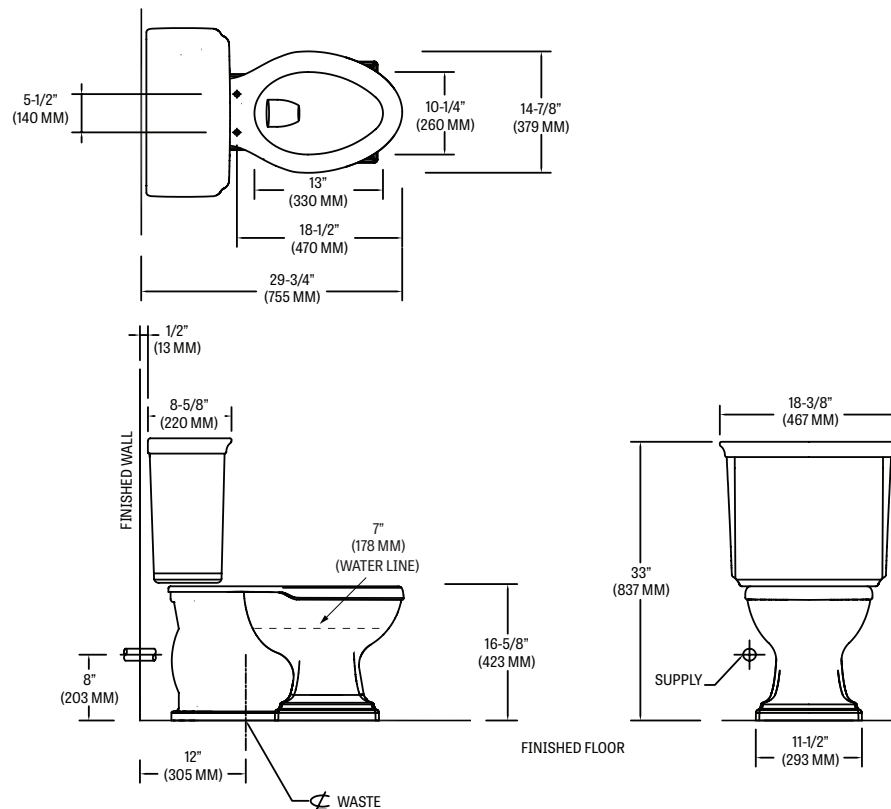

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.