



DUOFIT™ PIPE SUPPORT TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

SPECIFICATIONS

Oatey DuoFit Pipe Support with Nail provides fast and easy installation for ½" and ¾" copper tube size (CTS) piping with one clamp. DuoFit Pipe Support with Nail can eliminate contact between the pipe and framing surface and insulate against sound. DuoFit Pipe Support can be used with hydronic heating systems.

APPLICATION / USES

- Oatey DuoFit Pipe Clamps provide fast and easy installation and support for all types of piping including copper, CPVC, and PEX.
- *Patent Pending.*

APPROVALS AND LISTINGS

IAPMO Listed



PHYSICAL PROPERTIES


Material	Polypropylene
Color	Black
Temperature Range	0°F to 160°F

DIRECTIONS

Open clamp and snap over tube or piping. Slide into position. Hammer into place. Move nail to alternative slot to keep pipe off the stud. Barbed shank nail will set clamp and ridges will hold securely. Check with local codes to ensure proper spacing requirements for piping support.

PRODUCT SELECTOR

DUOFIT™ PIPE SUPPORT				
✓	Product Number	Description	Pack	Carton Weight
	34285	½"-¾" DuoFit Pipe Support System with Nail (100 per polybag)	500	7 lbs.
	34295	½"-¾" DuoFit Pipe Support System with Nail (12 per polybag)	6 bags	1 lb.
	34297	½"-¾" DuoFit Pipe Support System with Nail (400 in 2 Gallon Bucket)	1	MISSING

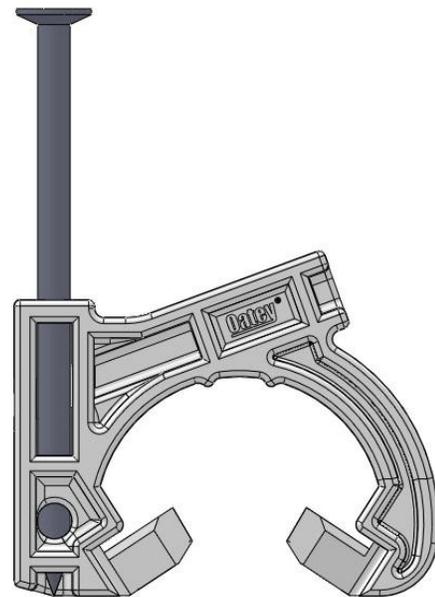

Access BIM/Revit content through www.oatey.com