



# SPIGOT FIT CLOSET FLANGE TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

## SPECIFICATIONS

Oatey Spigot Fit Closet Flanges shall be installed where required in drainage system. Closet flange shall be fastened to floor and provide two tabs, two mounting slots and eight countersunk screw holes. Flange shall be installed inside 3" or 4" hub fitting which connects to Schedule 40 DWV pipe. Closet flange shall be UPC listed.

## APPROVALS & LISTINGS

PVC Compliance Listing	IAPMO Listing File #2896 Markings: UPC, cUPC, ASTM D 2665
ABS Compliance Listing	IAPMO Listing File # 3905 Markings: UPC, cUPC, ASTM D 2661



Uniform Plumbing Code (UPC®)



CSA Approved


## PHYSICAL PROPERTIES

ABS Plastic	Black
PVC Plastic	White

## DIMENSIONS

SPIGOT FIT CLOSET FLANGE DIMENSIONS					
[A]:	Overall Height	2.30"	[D]:	Flange Ring Thickness	0.40"
[B]:	Overall Diameter	7.00"	[E]:	Height	1.80"
[C]:	Hub OD	3.50"			

## SPIGOT FIT CLOSET FLANGE DIMENSIONS

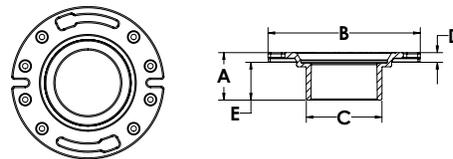

## PRODUCT SELECTOR

OATEY SPIGOT FIT CLOSET FLANGES						
✓	SKU Number	Material	Open/Testable	Connection Type	Ring Material	Pkg.Qty.
	43584	ABS	Open	3" Spigot	Plastic	12
	43585	PVC	Open	3" Spigot	Plastic	12
	43586	ABS	Open	4" Spigot	Plastic	12
	43587	PVC	Open	4" Spigot	Plastic	12

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)