

CODE NUMBER

3918990

DESCRIPTION

3.5 gpf, Rough Brass Finish, Anti-Flood Device Flush Connection, Single Flush, Royal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

DETAILS

Flush Volume: 3.5 gpf (13.2 Lpf)Finish: Rough Brass (RB)

Valve: Diaphragm

• Supply Pipe: 1" (25mm)

• Valve Body Material: Semi-red Brass

Fixture Type: Water Closet
 Fixture Connection: Rear spud
 Rough-In Dimension: 24" (610mm)
 Spud Coupling: 1 ½" (38mm)

• Flush Connection: Anti-Flood Device (AFD)

FEATURES

 Actuator not included, order separately. Specify actuator type based on Hydraulic Push Button Options



COMPLIANCES & CERTIFICATIONS





(UPC Certified, BAA Compliant)

RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

VALVE OPERATING PRESSURE (FLOWING)

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- Sloan Stainless Steel Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Series 900 Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 9611 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.



ROUGH-IN

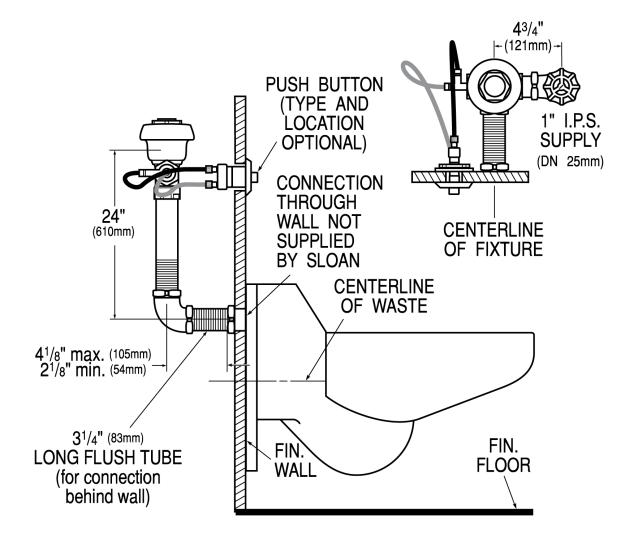

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com