

## Fluence<sup>®</sup>

# Frameless shower door K-702208-6L

#### **Features**

- 1/4" (6 mm) thick Crystal Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Smooth, quiet operation.
- Gently curved inside and outside towel bars complete the look of this door.
- CleanCoat® nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

#### Material

- Tempered glass ensures maximum safety and durability.
- Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

- Fits opening widths 44-5/8" 47-5/8" (1133 1210 mm).
- 3/8" (10 mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.


#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Included Components**

Additional Components:

Hardware kit



#### Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

#### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	MX	Matte Nickel
	ABV	<b>Anodized Brushed Bronze</b>

# Available Glass Options Code Description


L Crystal Clear





### Fluence<sup>®</sup>

# Frameless shower door K-702208-6L

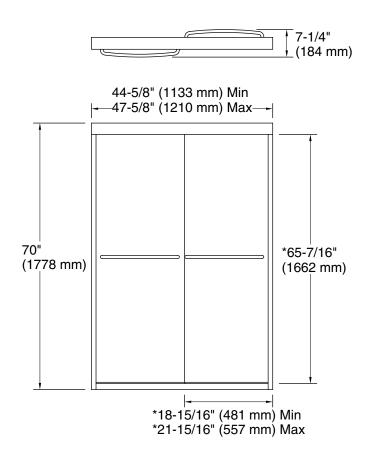


## **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 44-5/8" (1133 mm)
Opening Width - Max: 47-5/8" (1210 mm)
Walk-through - Min: 18-15/16" (481 mm)
Walk-through - Max: 21-15/16" (557 mm)

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

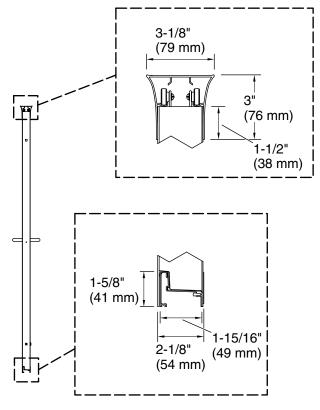

\*Walk-through

#### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 72-1/4" (1835 mm) to allow for installation clearance.

