

Oasis 3-Piece, 36-inch Shower Compartment With ActivLife 3-Bar (2-horizontal / 1-vertical) Package



Specification – Oasis 3-piece FRP gelcoat shower compartment SH3P-3636, offered in a standard 4-inch or 6-inch (ABF) dam configuration. ActivLife package includes a single horizontal bar on the back wall and control wall, and a vertical bar on the control wall.

Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar package is certified through an independent review program.

36-inch / Private Access / Bars Only



SH3P-3636 / BP2-L
(LH control / 3-bar package)
Model & Package Illustrated


NOTE: Positioning of factory attached grab bars allow for installation of a shower enclosure.




Home Innovation
LAB CERTIFIED™



| | Std Unit | ABF Unit |
|---|----------|----------|
| A | 76" | 78" |
| B | 74-3/4" | 76-3/4" |
| C | 4" | 6" |
| D | 1" | 3" |
| E | - | - |
| F | 24" | 26" |

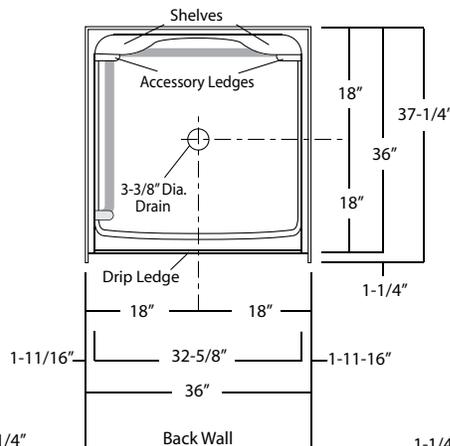

Enclosure Size:
32-5/8" w (max) x 70-3/4" h (max)

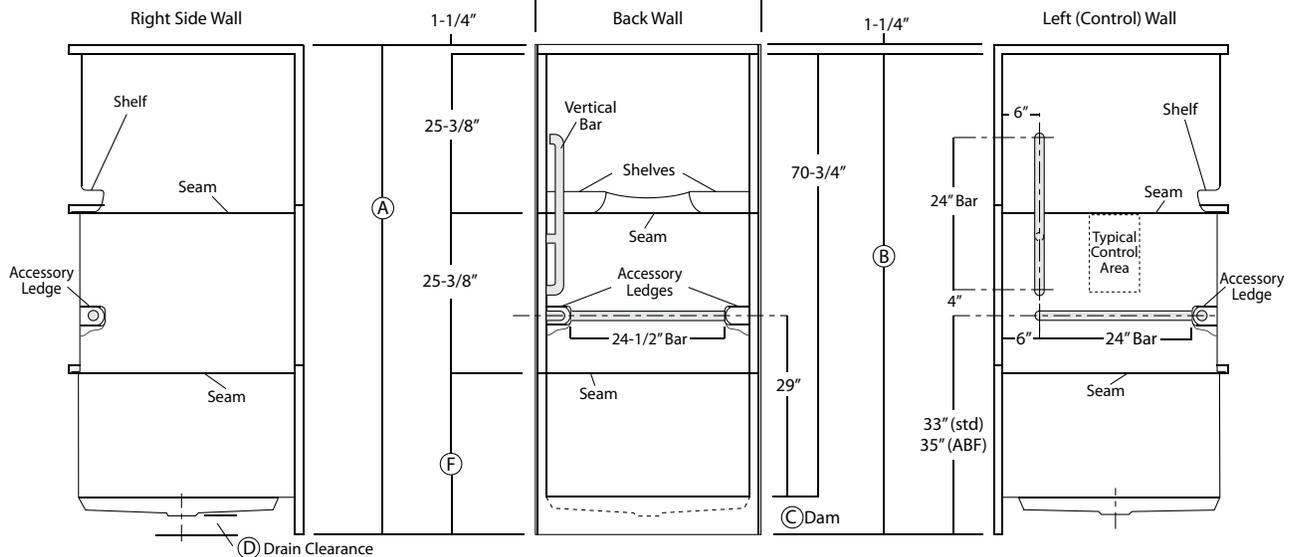

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

| Model ID | Package Code | Description (define configuration referencing control side) |
|----------|--------------|---|
|----------|--------------|---|

| | | |
|------------------------|----------------------|---|
| SH3P-3636 (Std or ABF) | / BP2-R (right wall) | 36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.50" dia. stainless steel 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall). |
| SH3P-3636 (Std or ABF) | / BP2-L (left wall) | |

Powder Coated Bar Packages (1.25-inch dia.)

| | | |
|------------------------|--------------------------|---|
| SH3P-3636 (Std or ABF) | / BP2-R WHT (right wall) | 36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. white powder coated 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall). |
| SH3P-3636 (Std or ABF) | / BP2-L WHT (left wall) | |
| SH3P-3636 (Std or ABF) | / BP2-R OFW (right wall) | 36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. off-white powder coated 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall). |
| SH3P-3636 (Std or ABF) | / BP2-L OFW (left wall) | |
| SH3P-3636 (Std or ABF) | / BP2-R SNK (right wall) | 36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. nickel finish 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall). |
| SH3P-3636 (Std or ABF) | / BP2-L SNK (left wall) | |

Package Notes:

1. Model available without listed package.
2. For 2-bar package, removing the vertical bar on control wall, see ActivLife "BP1" package code.
3. For single horizontal bar package, see ActivLife "BP5" package code.
4. For REINFORCEMENT ONLY for horizontal bars (HUD/FHA-Fair Housing), see ActivLife "FH" package code.
5. For expanded reinforcement package options, (with or without listed package components), see ActivLife "3SM" and "3SF" package codes.

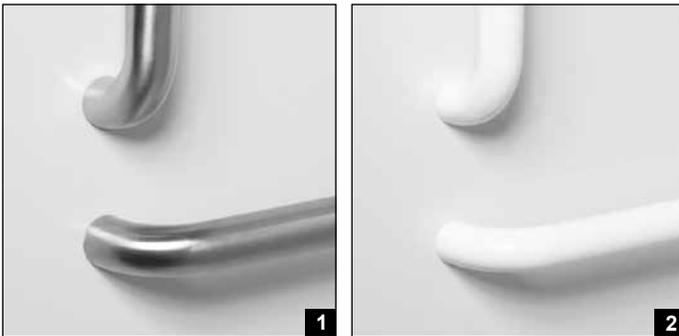
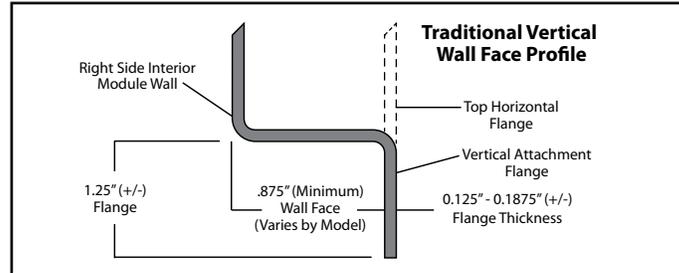


Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)