

Features

- Framed
- 3/16" glass
- ComforTrack technology
- Exterior towel bar
- Out-of-plumb adjustability
- Tempered glass ensures maximum safety and durability
- Anodized aluminum prevents rusting or corrosion

Installation

- Not for use in hospitality.
- For residential use only.

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

ADR


N

S

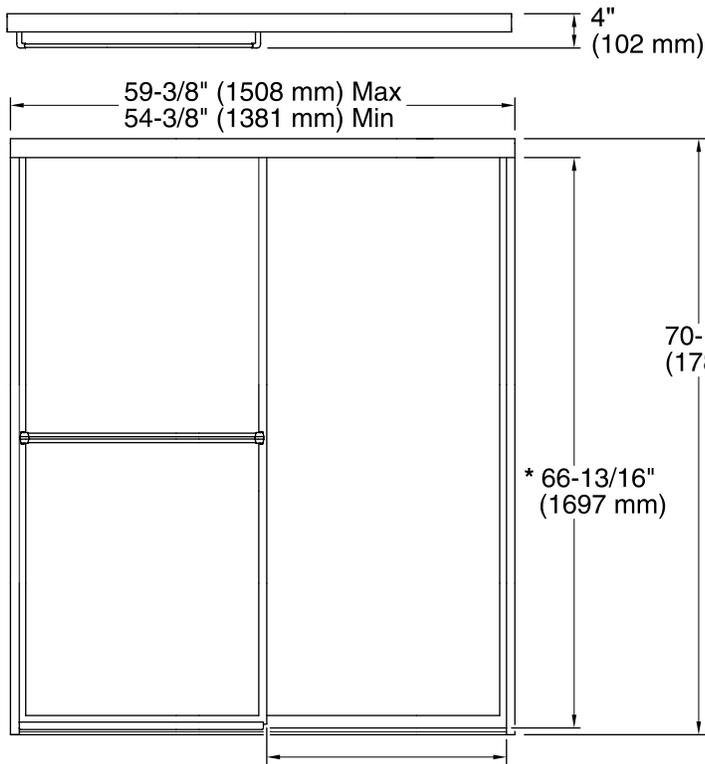

* 28-3/16" (716 mm) Max
* 25-11/16" (652 mm) Min

* **Walk-Through**

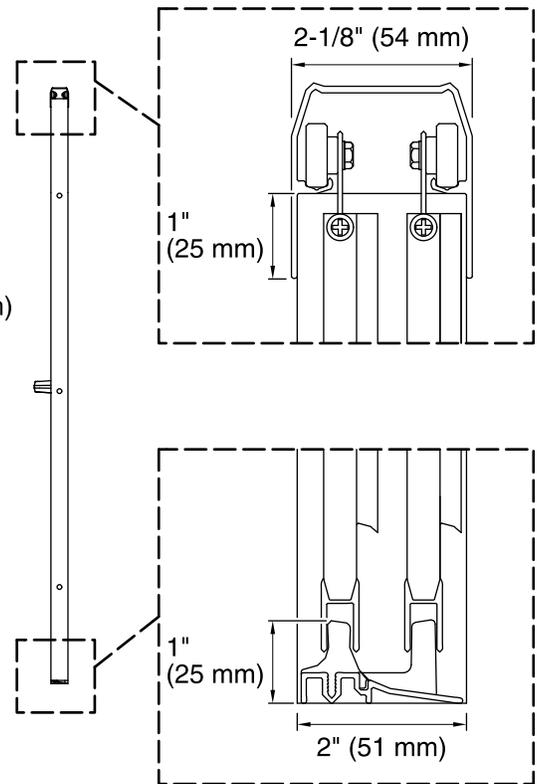

Technical Information

All product dimensions are nominal.
 Installation type: For shower base installation
 Opening style: Sliding/Bypass
 Opening Width - Min: 54-3/8" (1381 mm)
 Opening Width - Max: 59-3/8" (1508 mm)
 Walk-through - Min: 25-11/16" (652 mm)
 Walk-through - Max: 28-3/16" (716 mm)
 Glass thickness: 3/16" (5 mm)

Notes

Install this product according to the installation guide.